





## THINKSTATION P410

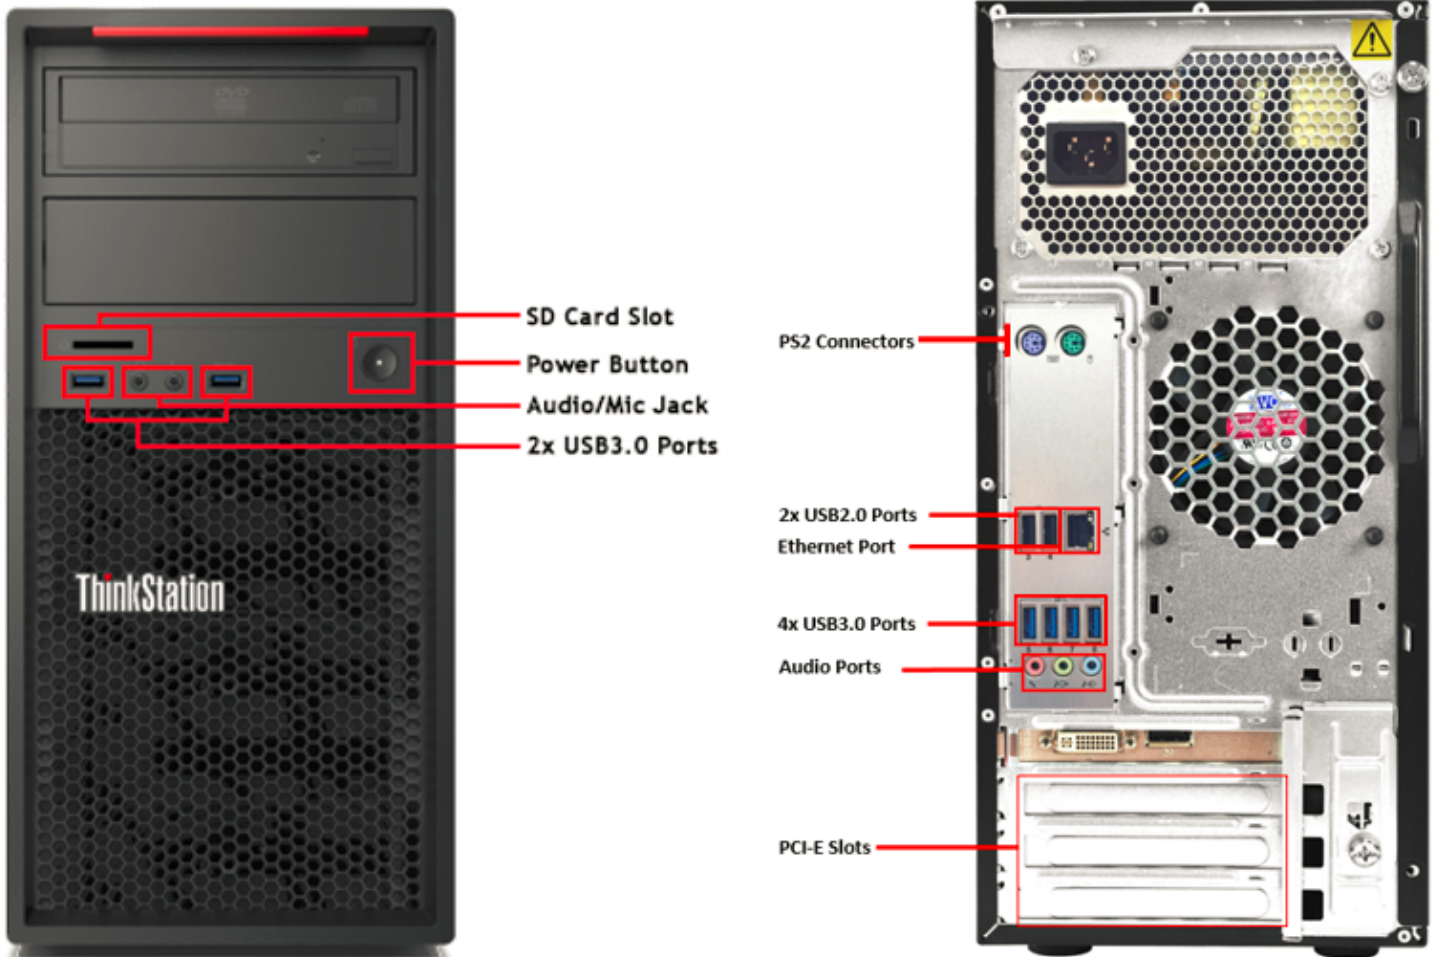

### Product Overview

The ThinkStation® P410 offers a higher core count and memory capacity than any entry-level workstation in the market, with the latest high-performance Intel® Xeon® processors with Turbo Max 3.0, NVIDIA® Quadro® professional graphics, cutting-edge storage technologies, including M.2, and innovative Flex module support for easy customization.

Closing the gap in price and performance between entry-level and mainstream workstations, the P410 is positioned between two Grantley-based dual socket workstations, the P710 and P910, and the Denlow-refresh single socket workstations, P310.

The P410 motherboard consists of the Intel® C612 Chipset, a single Socket-R processor socket, with support for up to 8 core processors from the Intel® Xeon line. Memory support consists of error-correcting code (ECC) unbuffered Double Data Rate 4 (DDR4) Synchronous Dynamic Random Access Memory (SDRAM). Maximum memory support of up to 128GB.

## SECTION I: SYSTEM OVERVIEW

### Operating Systems

#### Preloaded

Genuine Windows 10® Professional 64-bit

Genuine Windows 10DG to 7® Professional 64-bit

Genuine Windows 10® 64-bit

#### Supported

Red Hat Enterprise Linux 7

### Motherboard - P410

#### Form Factor

Board Size	10" x 9.6" (254mm x 244mm)
Layout	Custom ATX

#### Motherboard Core

Processor Support	Intel® Xeon™ Quad Core (Broadwell EP) Intel® Xeon™ Six Core (Broadwell EP) Intel® Xeon™ Eight Core (Broadwell EP)
Socket Type	Socket-R3 (LGA 2011)
Memory Support	1600/1866/2133/2400 MHz
QPI (GTPS)	6.4/8.0/9.6 GTPS Links
Voltage Regulator	Intel VR12.5 - 145W TDP Capable
Chipset (PCH)	Wellsburg (Intel 612)
Flash	16MB + Depoped 16MB
HW Monitor	
Super I/O	Nuvoton NCT6683D
Clock	Wellsburg (Intel 612) Native isCLK
Audio	Realtek ALC662
Ethernet	Intel Clarkville WGI218LM
SAS	Optional via Flex Adapter

#### Memory

Slots	4 Slots, 2 Slots on each side of CPU
Channels	4 Channels per CPU
Type	DDR4 288-Pin, 1600/1866/2133/2400 MHz RDIMM support
ECC Support	YES
Speed	Up to 2400 MHz
Max DIMM Size	Up to 32GB RDIMM
Max System Memory	Up to 128GB RDIMM

**Ethernet**

Vendor	Intel, Clarkville WGI218LM
Count	1
EEPROM	None for Clarkville
Speeds	10/100/1000 Mbps
Functions	PXE, ASF, WOL, Jumbo Frames, Teaming
Connectors	(1) x RJ45 on Rear I/O

**Audio**

Vendor	Realtek
Type	HD (5.1)
Internal Speaker	Yes, using SSM2211 amplifier
Connectors	(3) x Rear 3.5mm Jacks (Line In, Line Out, Microphone In) Global Headphone Jack (Headphone + MIC in) (1) x 2-Pin Internal Speaker Header

**Video**

Onboard	<Not Supported>
Adapter	(2) x PCI-E 3.0 16-Lane Slots Additional adapters may be supported in x4 slots for Spec Bids
Multi-GPU Support	BIOS supported, card dependent

**Storage**

Floppy	None
IDE	None
SATA/SAS	(5) x SATA Connectors, Gen. 3 (1) x eSATA Connector, Gen. 3 SATA RAID 0,1,5,10 supported natively via Intel Controller
eSATA	(1) x eSATA Connector, Gen. 3

**Slots**

Slot 1 (Near CPU)	PCIe x16, gen3, with Latch, Full Length, FH
Slot 2	PCIe x8, gen 3, Open Ended, Full Length, FH
Slot 3	PCIe x16, gen3, with Latch, Full Length, FH
Slot 4 (Near Edge 410)	PCIe x4, gen 3, Open Ended, Full Length, FH

**Internal I/O**

USB 3.0	6 total (2 front, 4 rear)
USB 2.0	4 Total (2 Rear, 2 Internal to MCR)
PS/2	Yes (2)
Audio	2x7-pin (Mic In, Headphone) Global Version
COM2	None
Clear CMOS	3-Pin Clear CMOS Header

Speaker	2-Pin Internal Speaker Header
Chassis Intrusion	2-Pin Chassis Intrusion Switch Header
Firewire	None

## Rear I/O

COM	(1) x Serial Port (COM1)
eSATA	(1) x eSATA Port (Gen. 2), optional via bracket
LPT	None
Video	<No Onboard Video>
Audio	Microphone-In, Line In, Line Out
Ethernet	(1) x RJ45
USB 2.0	(2) x USB 2.0 Ports
USB 3.0	(4) x USB 3.0 Ports
Firewire	Optional

## Thermal

Temp Sensors	Ambient Thermal Sensor - Thermal diode Connected to Super I/O VR1 Thermal Sensor - Thermal diode Connected to Super I/O VR2 Thermal Sensor- Thermal diode Connected to Super I/O PSU Thermal Sensor
Fans	Rear SYSTEM Fan x1 4-pin header with 4-pin key Front Fan 4-pin header with 4 pin key ODD bay Fan 4-pin header with 3-pin key PSU Fan Main PSU power connector CPU Fan Header x1 4-pin header with 4-pin key

## Power Connectors

Main	ATX power connector 2x7
Memory & CPU	ATX power connector 2x2
Graphics	

## Security

TPM	Version 1.2, Infineon SLB9660TT1.2
Asset ID	Yes, 1024X8bit
vPro	Intel vPro for WS (AMT 9.x)

## BIOS

Vendor	AMI
--------	-----

## Chassis Summary

### Chassis Information

Format	25L Rack Mountable Tower
Dimensions	425mm H x 175mm W x 431mm D

Weight	14.5 KG
Color	
PSU	450 watt 92% efficient
Thermal Solutions	Rear Fan Standard - Optional Front fan required for some configurations  One (1) additional front fan required for high-power PCIE adapters and to retain the flex slot (mezzanine) adapter

## Physical Security & Serviceability

Access Panel	Tool-less side cover removal
Optical Drive	Tool-less
Hard Drives	Tool-less
Expansion Cards	Tool-less
Processor Socket	Tool-less
Color coded User Touch Points	Yes
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Tool-less
Green Color Power LED on Front of Computer	Yes
Restore CD/DVD Set	Restore system to original factory shipping image - Can be obtained via Lenovo Support
Cable Lock Support	Yes, Optional Kensington Cable Lock
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Yes
Power-On Password	Yes
Setup Password	Yes
NIC LEDs (integrated)	Yes
Security Chip	Yes
Access Panel Key Lock	Optional
Boot Sequence Control	Yes
Padlock Support	Yes, loop in rear for optional padlock, prevents side panel removal
Boot without keyboard and/or mouse	Yes

## Operating Environment

### Air Temperature

- Operating: 10°C to 35°C (50°F to 95°F)
- Storage: -40°C to 60°C (-40°F to 140°F) in original shipping carton
- Storage: -10°C to 60°C (14°F to 140°F) without carton

### Humidity

- Relative Humidity Operating: 10% to 80% (non-condensing)
- Relative Humidity Storage/Transit: 10% to 90% (non-condensing)
- Wet Bulb Temperature Operating: 25°C max
- Wet Bulb Temperature Non-operating: 40°C max

**Altitude**

- Operating: -15.2 m to 3048 m (-50 ft to 10 000 ft)

**Regulations and Standards****EMC**

- FCC (DoC)/Canada
- CE (EMC)
- VCCI
- JEIDA
- C-Tick
- BSMI
- CCIB

**Safety**

- FCC (DoC)/Canada
- CE (EMC)
- VCCI
- JEIDA
- C-Tick
- BSMI
- CCIB
- PSB
- CE (LVD)

**Environmentals**

- Energy Star Program Requirements for Computers: Version 6.0 (select models)

**Energy Star**

- EPEAT™ Gold rating (select models)

**EPEAT**

- ErP Lot-6 2014 (via system setup option; default on for systems shipped to EMEA.)

**Hazardous Substances**

- Products do not contain more than; 0.1% lead, 0.01% cadmium, 0.1% mercury, 0.1% hexavalent chromium, 0.1% polybrominated biphenyls (PBB) or 0.1% polybrominated diphenol ethers (PBDE).
- Products do not contain Asbestos.
- Products do not contain Ozone Depleting Substances: Chlorofluorocarbons (CFC), hydrobromofluorocarbons (HBFC), hydrochlorofluorocarbons (HCFC), Halons, carbontetrachloride, 1,1,1-trichloroethane, methyl bromide
- Products do not contain more than; 0.005% polychlorinated biphenyl (PCB), 0.005% polychlorinated terphenyl (PCT) in preparation.
- Products do not contain more than 0.1% short chain chloroparaffins (SCCP) with 10-13 carbon atoms in the chain containing at least 48% per mass of chlorine in the SCCP
- Parts with direct and prolonged skin contact do not release nickel in concentrations above 0.5 microgram/cm<sup>2</sup>/week.

**SECTION II: SUPPORTED COMPONENTS****CPU Specifications**

2S Processor SKUs - These SKUs have 2 QPI links and are targeted for dual CPU systems but will also work on single CPU systems

Intel Xeon E5-2637 v4 - 4 Cores, 3.5GHz, 15MB Cache, DDR4-2400, Turbo, HT, 135W

Intel Xeon E5-2623 v4 - 4 Cores, 2.6GHz, 8.0GT/s QPI, 10MB Cache, DDR4-2133, Turbo, HT, 85W

Intel Xeon E5-2620 v4 - 8 Cores, 2.1GHz, 8.0GT/s QPI, 20MB Cache, DDR4-2133, Turbo, HT, 85W

**1S Processor SKUs - These SKUs have 1 QPI link and are targeted for single CPU systems. If these are to be used in a dual processor system, only one 1S CPU can be installed and the CPU2 memory slots will not be functional.**

Intel Xeon E5-1680 v4 - 8 Cores, 3.4GHz, 20MBCache, DDR4-2400, Turbo, HT, 140W

Intel Xeon E5-1660 v4 - 8 Cores, 3.2GHz, 20MB Cache, DDR4-2400, Turbo, HT, 140W

Intel Xeon E5-1650 v4 - 6 Cores, 3.6GHz, 15MB Cache, DDR4-2400, Turbo, HT, 140W

Intel Xeon E5-1630 v4 - 4 Cores, 3.7GHz, 10MB Cache, DDR4-2400, Turbo, HT, 140W

Intel Xeon E5-1620 v4 - 4 Cores, 3.5GHz, 10MB Cache, DDR4-2400, Turbo, HT, 140W

Intel Xeon E5-1607 v4 - 4 Cores, 3.1GHz, 10MB Cache, DDR4-2133, 140W

Intel Xeon E5-1603 v4 - 4 Cores, 2.8GHz, 10MB Cache, DDR4-2133, 140W

## Notes

Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families.

Multi core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; not all customers or software applications will necessarily benefit from use of these technologies.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations

## Memory Specifications

RDIMMs - 2400MHz

4GB DDR4 ECC RDIMM PC4-2400

8GB DDR4 ECC RDIMM PC4-2400

16GB DDR4 ECC RDIMM PC4-2400

32GB DDR4 ECC RDIMM PC4-2400

## Storage - Hard Drive/SSD Specifications

**3.5" SATA Hard Disk Drive (HDD)**

500GB SATA - 7200rpm, 6Gb/s, 3.5"

1TB SATA - 7200rpm, 6Gb/s, 3.5"

2TB SATA - 7200rpm, 6Gb/s, 3.5"

3TB SATA - 7200rpm, 6Gb/s, 3.5"

**3.5" Enterprise SATA Hard Disk Drive (HDD)**

4TB SATA - 7200rpm, 6Gb/s, 3.5"

**3.5" Hybrid Drive**

1TB SATA - 7200rpm, 6Gb/s, 3.5" Hybrid

**2.5" SAS Hard Disk Drive (HDD)**

300GB SAS - 10000rpm, 12Gb/s, 2.5"

600GB SAS - 10000rpm, 12Gb/s, 2.5"

**2.5" SATA Solid State Drive (SSD)**

128GB SATA SSD, 6Gb/s, 2.5" Non-OPAL

256GB SATA SSD, 6Gb/s, 2.5" Non-OPAL

256GB SATA SSD, 6Gb/s, 2.5" OPAL

512GB SATA SSD, 6Gb/s, 2.5" Non-OPAL

1 TB SATA SSD , 6Gb/s, 2.5" Non-OPAL

180GB SATA SDD.6Gb/s, , 2.5" OPAL

240GB SATA SDD.6Gb/s, , 2.5" OPAL

480GB SATA SDD.6Gb/s, , 2.5" OPAL

**M.2 (NGFF) PCIe Solid State Drive (SSD)**

256 GB M.2 PCIe - Solid State Drive (SSD), Gen3x4, OPAL NVMe

512 GB M.2 PCIe - Solid State Drive (SSD), Gen3x4, NVMe

**RAID**

Supported RAID levels for a system will vary from the stated capabilities of the RAID controller due to dependencies on the number and capacity of physical disks in the system and on customer requirements for performance, fault tolerance, or data redundancy. Max support RAID 0,1,5,10

RAID levels and requirements:

- RAID 0 (striping) provides increased performance by writing data across multiple drives.
- RAID 1 (mirroring) provides fault tolerance by writing the data on two drives.
- RAID 5 (striping with parity) uses distributed parity data to provide fault tolerance more efficiently than RAID 1. Requires three or more drives.
- RAID 10 (or RAID 1+0) combines
- RAID 1 and RAID 0 to create a stripe of mirrors that is fault tolerant while offering increased performance. Requires four drives.

**Optional Hard Disk Drive Controllers**

- LSI 9340-8i SATA/SAS IOC RAID adapter

**Optical Drive/Removable Media****DVD-ROM Drive (SATA)**

DVD-ROM Drive - 16x/48x (SATA)

**DVD Burner/CD-RW Rambo Drive (SATA)**

DVD Burner/CD-RW Rambo Drive (SATA)

**Blu-Ray Burner Drive (SATA)**

Blu-Ray Burner Drive w/AACS encryption (SATA)

**DVD Burner/CD-RW Rambo Drive (Slim SATA)**



DVD Burner/CD-RW Rambo Drive (9.5mm Slim SATA)

#### Media Card Reader

Front 9 in 1 Media Card reader Standard

Front 29 in 1 Media card reader, USB3.0, MPOB, 760mm (Requires FLEX Module)

#### Keyboard

- Preferred Pro Fullsize Keyboard (USB)
- Preferred Pro Fullsize Keyboard (PS/2)
- Smart Card KYB
- Chicony KUF1256 fingerprint KB Win8
- Lenovo Slim New F5 USB Keyboard

#### Pointing Devices

- Optical Wheel Mouse (1000 DPI), USB - red wheel
- Lenovo USB Laser Mouse for win7 and win10
- PS2 black optical mouse with new logo
- 3DConnexion CadMouse

#### Graphics Cards

Nvidia NVS310 (DP x 2) - 1GB DDR3

Nvidia NVS315 (with DMS-59 to Dual DVI single link dongle) - 1GB GDDR3

Nvidia NVS315 (with DMS-59 to Dual Display Port dongle) - 1GB GDDR3

Nvidia NVS 510 (mini DP x 4) - 2GB DDR3

NVS 810 (miniDPx8) - 4GB DDR3 ATX ATX with short extender kit

2 x NVS 810 (miniDPx8) - 4GB DDR3 ATX with short extender kit

Nvidia Quadro K420(DP/DVI) - 2GB DDR3- ATX

Nvidia Quadro K620 (DVI, DP) - 2GB DDR3 ATX

Nvidia Quadro K1200 (Mini Dp x 4) - 4GB GDDR5 HP

Nvidia Quadro M2000 (Dp x 4) - 4GB ATX

NVIDIA Quadro M4000(DP x4) - 8GB GDDR5 ATX with short extender - HP kit

2 x NVIDIA Quadro M4000(DP x4) - 8GB GDDR5 ATX with short extender - HP kit

Nvidia Quadro M5000 (DVI, DP x 4) - 8GB GDDR5- ATX short extender kit

#### NVIDIA Stereo 3D Bracket

Nvidia Stereo 3D Connector Bracket

#### FLEX Components

Flex Bay: Formerly known as ODD bays. Will support not only ODD, but also HDDs and Flex Module

Flex Module: Module supported in the Flex Bay with several options integrated. Will support slim ODD, High Speed Media Card Reader or 2 universal ports supporting IEEE1394, eSATA, etc...

#### PCIe

Network

Intel I210-T1 Single Port Gigabit Ethernet Adapter

Intel I350-T2 Dual Port Gigabit Ethernet Adapter

	Intel I350-T4 Quad Port Gigabit Ethernet Adapter
	Bitland BN8E88 1000M PCIE ASF FH
Thunderbolt	Intel Thunderbolt PCIe Add-In-Card
IEE 1394	IEEE 1394a (Firewire-400) PCI Express x1 Adapter (1 external, 1 internal port)
USB	USB 3.0 PCI Express x1 Adapter
Wifi Card	PCI-E 1X Wifi Card with BT HP Kit (Snowfield Peak 2 8260 AC)
Parallel Card	Sunix 1 - Port IEEE1284 Parallel PCI Express x1 Communication card full Height
PCIe to M.2 Adapter Card	PCIe x4 to M.2 (For NVMe SSD) - HP

## SECTION III: SYSTEM TECHNICAL SPECIFICATIONS

### Power Supply Specifications

Power Supply	450W PSU
Operating Voltage Range	90-264VAC
Rated Voltage Range	100-240V
Rated Line Frequency	50/60Hz
Operating Line Frequency Range	47Hz/63Hz
Rated Input Current	8A-4A
Power Supply Fan	120x25mm, 1800rpm max
ENERGY STAR® qualified (Config Dependent)	*System level select models
80 PLUS Compliant	Yes 80 PLUS Platinum
Built-in Self Test (BIST) LED	N
Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	YES
Aux Power Drop	Single Drop 6Pin

[Click here to access the ThinkStation Power Calculator.](#)

### BIOS Specifications

WMI Support	Compliant with Microsoft WBEM and the DMTF Common Information Model
ROM-Based Setup Utility (F1)	System Configuration Setup program available at power-on with F1 key
Bootblock Recovery	Recovers system BIOS when Flash ROM corrupted.
Replicated Setup	Saves System Configuration settings to file that can then be used replicated to other systems.
Boot Control	Boot control available through ROM-Based Setup Utility or with F12 key at power-on
Memory Change Alert	Power-on Error message in event of decrease in system memory
Thermal Alert	Power-on Error message in event of fan failure
Asset Tag	Support ability to set SMBIOS Type 2 Baseboard Asset Tag field.
System/Emergency ROM Flash Recovery with Video	Support process to recover system BIOS when Flash ROM corrupted

Remote Wakeup/Remote Shutdown	System admin can power on/off a client computer from remote location to provide maintenance
Quick Resume time	Support for power S3 (suspend to RAM) and prompt resume times
ROM revision level	System UEFI (BIOS) version reported in SMBIOS Type 0 structure and in BIOS Setup
Keyboard-less Operation	System can be booted without a keyboard
Per-port Control	Allows I/O ports to be individually enabled/disabled through ROM-based setup or WMI interface
Adaptive Cooling	Fans dynamically controlled by system BIOS based on temperature. User has ability to provide custom fan control table
Security	User and Administrator passwords can protect boot and ROM-based Setup. Chassis intrusion detection protect
Intel(R) AMT (includes ASF 2.0)	Allows system to be supported from a remote location
Intel(R) TXT	Intel(R) Trusted Execution Technology provides a security foundation to build protections against software base attacks.
Memory modes	Supports mirroring, lock step, and sparing memory modes
Windows 8 ready	Supports Windows 8 requirements - Secure flash, UEFI v 2.3.1 spec
Industry Standard Specification Support	
UEFI	Unified Extensible Firmware Interface v2.3.1d
ACPI (Advanced Configuration and power Management Interface)	Advanced Configuration and Power Interface v5.0
ASF 2.0	DMTF Alert Standard Format Specification v2.0
ATA (IDE)	ATA Attachment 6 with Packet Interface (ATA/ATAPI-6)
CD Boot	"El Torito" Bootable CD-Rom Format Specification, Version 1.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	PCI Local Bus v3.0 PC Firmware Specification 3.1
PCI Express	PCI Express Base Specification 3.0
SATA	Serial ATA Revision 3.0 Specification
TPM	Trusted Computing Group TPM Specification Version 1.2
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB	Universal Serial Bus Revision 1.1 Universal Serial Bus v2.0 Universal Serial Bus v3.0
SMBIOS	DMTF System Management Spec v2.8.0

## Social and Environmental Responsibility

## Quality Control

- Lenovo is a member of an eco declaration system that enforces regular independent quality control

## Hazardous substances and preparation

- Products do not contain more than; 0.1% lead, 0.01% cadmium, 0.1% mercury, 0.1% hexavalent chromium, 0.1% polybrominated biphenyls (PBB) or 0.1% polybrominated diphenyl ethers (PBDE). (See legal
- reference and Note B1
- Products do not contain Asbestos
- Products do not contain Ozone Depleting Substances: Chlorofluorocarbons (CFC), hydrobromofluorocarbons (HBFC), hydrochlorofluorocarbons (HCFC), Halons, carbontetrachloride, 1,1,1-trichloroethane, methyl bromide
- Products do not contain more than; 0.005% polychlorinated biphenyl (PCB), 0.005% polychlorinated terphenyl (PCT) in preparation
- Products do not contain more than 0.1% short chain chloroparaffins (SCCP) with 10-13 carbon atoms in the chain containing at least 48% per mass of chlorine in the SCCP
- Parts with direct and prolonged skin contact do not release nickel in concentrations above 0.5 microgram/cm<sup>2</sup>/week
- REACH Article 33 information about substances in articles is available at: [http://www.lenovo.com/social\\_responsibility/us/en/ThinkGreen\\_products.html#environment](http://www.lenovo.com/social_responsibility/us/en/ThinkGreen_products.html#environment)

## Batteries

- If the product contains a battery or an accumulator, it is labeled with the disposal symbol and if it contains more than 0.0005% of mercury (for button cells only) by weight, or more than 0.004% of lead, it shall be marked with the chemical symbol for the metal concerned, Hg or Pb. Information on proper disposal is provided in user manual
- Button cells used in the product do not contain more than 2% by weight of mercury. Other batteries or accumulators do not contain more than 0.0005% of mercury or 0.002% of cadmium
- Batteries and accumulators are easily removable by either users or service providers (as dependent on the design of the product). Exception: Batteries that are permanently installed for safety, performance, medical or data integrity reasons do not have to be "easily removable"

## Safety, EMC connection to the telephone network and labeling

- The product complies with legally required safety standards as specified
- The product complies with legally required standards for electromagnetic compatibility
- If product is intended for connection to a public telecom network or contains a radio transmitter, it complies with legally required standards for radio and telecommunication devices
- The product is labeled to show conformance with applicable legal requirements

## Product packaging

- Packaging and packaging components do not contain more than 0.01% lead, mercury, cadmium and hexavalent chromium by weight of these together.
- Plastic packaging material is marked according to ISO 11469 referring ISO 1043

- The product packaging material is free from ozone depleting substances as specified in the Montreal Protocol

## Manageability

Industry Standard Specifications	This product meets the following industry standard specifications for manageability functionality:  Intel LAN with AMT
Remote Manageability Software Solutions	Lenovo ThinkStation is supported on the following remote manageability software consoles:  Lenovo ThinkManagement Console  <a href="http://www.landesk.com/lenovo">LANDesk Management Suite for ThinkVantage Technologies (www.landesk.com/lenovo)</a>  Microsoft System Center Configuration Manager
System Software Manager	Lenovo ThinkStation supports software management tools from the ThinkVantage System Update suite:  System Update  Update Retriever  Thin Installer
Service, Support, and Warranty	On-site Warranty and Service: Three-years, limited warranty and service offering delivers on-site, next business-day service for parts and labor and includes free telephone support 8am - 5pm. Global coverage ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.

Go to [www.lenovo.com/support](http://www.lenovo.com/support) and [www.lenovo.com/warranty](http://www.lenovo.com/warranty) for more details

## SECTION IV: COMPONENT SPECIFICATIONS

### HDD Specifications

#### 3.5" SATA Hard Disk Drive (HDD)

500GB SATA - 7200rpm, 6Gb/s, 3.5"

1TB SATA - 7200rpm, 6Gb/s, 3.5"

2TB SATA - 7200rpm, 6Gb/s, 3.5"

3TB SATA - 7200rpm, 6Gb/s, 3.5"

#### 3.5" Enterprise SATA Hard Disk Drive (HDD)

4TB SATA - 7200rpm, 6Gb/s, 3.5"

#### 3.5" Hybrid Drive

1TB SATA - 7200rpm, 6Gb/s, 3.5" Hybrid

#### 2.5" SAS Hard Disk Drive (HDD)

300GB SAS - 10000rpm, 12Gb/s, 2.5"

600GB SAS - 10000rpm, 12Gb/s, 2.5"

	2.5 10K SAS 300G/600G (Model:Thunderbolt)	3.5 7200 Enterprise 4T/6T (Model:Makara)	3.5 7200 Enterprise 4T/6T (Model:MakaraBP)	3.5" 7200 2T/3T (Model:Grenada BP-R )	3.5" 7200 500G/1T (Model:Pharaoh Oasis)	3.5" 7200RPM Hybrid2T/1T (Model:Grenada BP2H )
Connector	SAS	SATA	SATA	SATA	SATA	SATA

Transfer Rate (Gb/sec)	12Gb	600MB/sec	600MB/sec	600MB/sec	600MB/sec	600MB/sec
<b>Performance</b>						
Spindle Speed(RPM)	10,000 +/-	7200	7200	7200	7200	7200
Power off to Spindle Stop(sec)	20 max	23 max	23 max	11 max	10 max	11 max
DC Power to Drive Ready(sec)	20 max	30 max	30 max	10 max	10 max	
Receipt of Start Unit Command to Drive Ready(sec)	20 max	30 max	30 max	17 max	10 max	
Average Latency(msec)	2	4.16	4.16	4.16	4.16	4.16
<b>Power Management</b>						
Input(VDC)	+5v +- 5%+12v +- 5%	+5v +- 5%+12v +- 5%	+5v +- 5%+12v +- 5%	+5v +- 5%+12v +- 5%	+5v +- 5%+12v +- 5%	+5v +- 5%+12v +- 5%
Typical(Watts)	7.8(1.8T)	10.62(6T)	10(6T)	8 max	5.57 max	6.7 max
Idle(Watts)	4.55(1.8T)	8(6T)	6.2(6T)	5.4 (Idle 2)	4.21	4.5 (Idle 2)
<b>Dimensions</b>						
Height(mm - Max)	15	26.11	26.11	26.1	20	26.11
Width(mm)	69.85	101.6	101.6	101.6	101.6	101.6
Depth(mm - Max)	100.45	146.99	146.99	146.99	146.99	146.99
Weight(grams)	199 (maximum)	780 max	705 max	626 max	415 max	535
<b>Temperature</b>						
Operating(C) Ambient	5 to 55	5 to 60	5 to 60	0 to 60	0 to 60	0 to 60
Operating(C) Base Casting	60 max					
Non-Operating(C) Ambient	-40 to 70	-40 to 70	-40 to 70	-40 to 70	-40 to 70	-40 to 70
Gradient(C per Hour)	20 max	20 max	20 max	30 max	30 max	30 max
<b>Shock</b>						
Operating(Gs @ 2ms)	25	70(read) 40(write)	70(read) 40(write)	70 max	80 max	80 max
Non-Operating(Gs @ 2ms)	400	250 6T,300 other	250 6T,300 other	350 max	300 max	300 max

## SSD Specifications

### 2.5" SATA Solid State Drive (SSD)

128GB SATA SSD, 6Gb/s, , 2.5" Non-OPAL

256GB SATA SSD, 6Gb/s, , 2.5" Non-OPAL

256GB SATA SSD, 6Gb/s, , 2.5" OPAL

512GB SATA SSD, 6Gb/s, , 2.5" Non-OPAL

1 TB SATA SSD , 6Gb/s, , 2.5" Non-OPAL

180GB SATA SSD. 6Gb/s. , 2.5" OPAL

240GB SATA SSD, 6Gb/s, , 2.5" OPAL

480GB SATA SSD, 6Gb/s, , 2.5" OPAL

**M.2 (NGFF) PCIe Solid State Drive (SSD)**

256 GB M.2 PCIe - Solid State Drive (SSD), Gen3x4, OPAL NVMe

512 GB M.2 PCIe - Solid State Drive (SSD), Gen3x4, NVMe

	180GB SATA SSD. 6Gb/s. OPAL.2.5"	240GB SATA SSD, 6Gb/s,OPAL. 2.5"	480GB SATA SSD, 6Gb/s,OPAL. 2.5"	128GB SATA SSD, 6Gb/s, 2.5" Non-OPAL	256GB SATA SSD, 6Gb/s, 2.5" OPAL	256GB SATA SSD, 6Gb/s, 2.5" Non-OPAL	512GB SATA SSD, 6Gb/s, 2.5" Non-OPAL	1 TB SATA SSD , 6Gb/s, 2.5" Non-OPAL
Min Sequential Read	540 MB/s	540 MB/s	540 MB/s	460 MB/s	520 MB/s	520 MB/s	520 MB/s	560 MB/s
Min Sequential Write	490 MB/s	490 MB/s	490 MB/s	270 MB/s	450 MB/s	450 MB/s	440 MB/s	510 MB/s
Min Random Read (8GB Span)	41000 IOPS	41000 IOPS	48000 IOPS	77000 IOPS	92000 IOPS	92000 IOPS	86000 IOPS	100,000 IOPS
Min Random Write (8GB Span)	49000 IOPS	49000 IOPS	37000 IOPS	60000 IOPS	38000 IOPS	38000 IOPS	53000 IOPS	88,000 IOPS
Min Power - Active	165 mW	165 mW	165 mW	155 mW	155 mW	155 mW	155 mW	150 mW
Min Power - Idle	55 mW	55 mW	55 mW	75 mW	75 mW	75 mW	75 mW	70 mW
Min MTBF	1.2 M hours	1.2 M hours	1.2 M hours	1.5 M hours	1.5M hours	1.5M hours	1.5M hours	1.5M hours
Hardware Encryption	AES 256 bit	AES 256 bit	AES 256 bit	AES 256 bit	AES 256 bit	AES 256 bit	AES 256 bit	AES 256 bit

Interface	PCIe Gen3 x4 OPAL NVMe	PCIe Gen3 x4 NVMe
Capacity	256GB	512GB
Performance	Sequential Read	2,250 MB/s
	Sequential Write	1,250 MB/s
	Random Read	295,000 IOPS
	Random Write	93,000 IOPS
Power Consumption	6.5W	5.5W

**HDD Controllers**

**LSI 9340-8i SATA/SAS IOC RAID adapter**

**LSI 9340-8i SATA/SAS IOC RAID adapter**

PCI Bus	x8 lane PCI Express® 3.0
PCI Modes	
RAID Levels	RAID 0, 1, 5, 10, 50 and JBOD mod
Data Transfer Rates	Up to 12Gb/s per port
PCI Card Type	
PCI Voltage	+3.3V, +12V

PCI Power

Bracket Full Height and Low-Profile

Certification Level

Internal Connectors 2 HD Mini-SAS SFF8643 (Vertical mount)

## Optical Drives Specifications

	DVD-ROM Drive - 16x/48x (SATA)	DVD Burner/CD-RW Rambo Drive (SATA)	Blu-Ray Burner Drive w/AACS encryption (SATA)	DVD Burner/CD-RW Rambo Drive (9.5mm Slim SATA)
Description	5.25-inch, half-height, tray-load	5.25-inch, half-height, tray-load	5.25-inch, half-height, tray-load	9.5mm slim, tray-load
Mounting Orientation	Either horizontal or vertical	Either horizontal or vertical	Either horizontal or vertical	Either horizontal or vertical
Interface Type	SATA/ATAPI	SATA/ATAPI	SATA/ATAPI	SATA/ATAPI
Dimensions	(WxHxD) 15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)	(WxHxD) 15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)	(WxHxD) 15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)	(WxHxD) 128 x 9.5 x 127cm MAX
Disc Capacity DVD-ROM	Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB	Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB	Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB	Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB
Access Times				
DVD-ROM Single Layer	< 140 ms (typical)	< 140 ms (typical)	< 140 ms (typical)	< 160 ms (typical)
CD-ROM Mode 1	< 125 ms (typical)	< 125 ms (typical)	< 125 ms (typical)	< 140 ms (typical)
Full Stroke DVD	< 250 ms (seek)	< 250 ms (seek)	< 250 ms (seek)	< 250 ms (seek)
Full Stroke CD	< 210 ms (seek)	< 210 ms (seek)	< 210 ms (seek)	< 210 ms (seek)
Power				
Source	SATA DC power receptacle	SATA DC power receptacle	SATA DC power receptacle	SATA DC power receptacle
DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 10%-200 mV ripple p-p	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 10%-200 mV ripple p-p	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 10%-200 mV ripple p-p	5 VDC ± 5%-100 mV ripple p-p
DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 1000 mA typical, < 2000 mA maximum	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 1000 mA typical, < 2000 mA maximum	5 VDC - <1100 mA typical, < 2000 mA maximum 12 VDC - < 1600 mA typical, < 2500 mA maximum	5 VDC - <1000 mA typical, < 1500 mA maximum
Operating Environmental				
Temperature	5° to 50° C (41° to 122° F)	5° to 50° C (41° to 122° F)	5° to 50° C (41° to 122° F)	5° to 50° C (41° to 122° F)
Relative Humidity	8% to 80%	8% to 80%	8% to 80%	8% to 80%
Maximum Wet Bulb Temperature	30° C (86° F)	30° C (86° F)	30° C (86° F)	30° C (86° F)
Operating Systems Supported	Windows 10 Professional or Home 64-bit Windows 7 Professional 64-bit Red Hat Enterprise Linux(RHEL) 7.2 Desktop/Workstation. No driver is required for this device. Native support is provided by the operating system.	Windows 10 Professional or Home 64-bit Windows 7 Professional 64-bit Red Hat Enterprise Linux(RHEL) 7.2 Desktop/Workstation. No driver is required for this device. Native support is provided by the operating system.	Windows 10 Professional or Home 64-bit Windows 7 Professional 64-bit Red Hat Enterprise Linux(RHEL) 7.2 Desktop/Workstation. No driver is required for this device. Native support is provided by the operating system.	Windows 10 Professional or Home 64-bit Windows 7 Professional 64-bit Red Hat Enterprise Linux(RHEL) 7.2 Desktop/Workstation. No driver is required for this device. Native support is provided by the operating system.



## Graphics Cards

	<b>M5000</b>	<b>M4000</b>	<b>M2000</b>	
# CUDA Cores	2048	1664	768	
Single Precision	4.3 TFLOPs	2.6 TFLOPs	1.8 TFLOPs	
PCIe Gen	3	3	3	
Memory Size	8 GB	8 GB	4GB	
Memory BW	211 GB/s	192 GB/s	105.7 GB/s	
Slots + Display Connectors	4x DP + 1x DVI	4x DP	4x DP	
Display Support	4	4	4	
Advanced Display	SDI, SYNC, Stereo	SDI, SYNC, Stereo	N/A	
Board Power	150 W	120 W	75W	
SLI Support	Yes	Yes	No	
Form Factor	FH	FH	FH	
	<b>K2200</b>	<b>K1200</b>	<b>K620</b>	<b>K420</b>
# CUDA Cores	640	512	384	192
Single Precision	1.3 TFLOPs	1 TFLOPs	0.8 TFLOPs	0.3 TFLOPs
PCIe Gen	2	2	2	2
Memory Size	4 GB	4GB	2 GB	1 GB
Memory BW	80 GB/s	80 GB/s	29 GB/s	29 GB/s
Slots + Display Connectors	2x DP + DVI	4x mDP	DP + DVI	DP + DVI
Display Support	4	4	4	4
Advanced Display	N/A	N/A	N/A	N/A
Board Power	68 W	46 W	45 W	41 W
SLI Support	No	No	No	No
Form Factor	FH	LP	HH	HH
	<b>NVS310</b>	<b>NVS315</b>	<b>NVS510</b>	<b>NVS810</b>
# CUDA Cores	48	48	192	1024(512 per GPU)
PCIe Gen	2	2	2	3
Memory Size	512 MB	1GB	2GB	4GB
Memory BW	14 GB/s	14 GB/s	28.5 GB/s	28.8 GB/s
Slots + Display Connectors	DMS-59	DMS-59	Mini DP	Mini DP
Max Display	2	2	4	8
Max Power	19.5 W	19.3 W	35 W	68 W
Max Resolution	2560 × 1600 at 60Hz (DP)	2560 × 1600 at 60Hz (DP)	3840×2160 at 60Hz (DP)	4096×2160 at 30Hz (DP)
Form Factor	LP	LP	LP	FH

## Networking

Connector	RJ-45
Controller	Intel, Clarkville WGI218LM

#### Intel i218 Gigabit Ethernet - LM

Lithography	40 nm
TDP	0.5 W
Operating Temperature Range	0 °C to 85 °C
# of Ports	Single
Data Rate Per Port	1 Gbps
Jumbo Frames Supported	Yes
1000Base-T	Yes
Supported Under vPro	Yes

#### Other

##### MEDIA CARD READER

9 in 1

##### Description

The Media card reader device is standard in our Pseries products. The device connects to a 2x5 two channel USB header on the motherboard of the system. There is no USB controller card provided. Please see the Disc Formats section below for a list of flash memory card formats that are supported.

**Mounting Orientation** The Media Card Reader can not be changed and is hard wired into the system

##### Interface Type

USB 2.0 (one channel dedicated to the separate USB port; one channel dedicated to the flash memory card slots)

##### Disc Formats

SD  
SDHC  
SDXC  
Mini SD  
Mini SDHC  
Micro SD\*  
Micro SDHC\*  
Micro SDXC\*  
RS-MMC  
MMC  
MMC Micro  
MMC Mobile  
MMC Plus

29 in 1

##### Description

The Media card reader mounts into our FLEX module which fits into a standard 5.25" Optical bay.

**Mounting Orientation** The Media Card Reader can not be changed, it only fits into the FLEX Module one way.

##### Interface Type

USB 3.0 (one channel dedicated to the separate USB port; one channel dedicated to the flash memory card slots)

##### Disc Formats

xD-H  
xD-M  
Micro SD  
Micro SDHC  
SD  
SDHC  
SDXC  
Mini SD  
Mini SDHC  
MultiMediaCard (MMC)  
Reduced Size MultiMediaCard (RS MMC)  
(MMC Plus)  
(MMC Mobile)

M2

CompactFlash Card Type I (CF Type 1)

CF Type 2

MicroDrive (MD)

Memory Stick (MS)

Memory Stick Select

MS Duo

MS PRO

MS PRO DuMS PRO-HG Duo

MS XS Duo

MS XC-HG Duo

MS HG Micro\*

MS XC Micro\*

MS XC-HG Micro\*

MMC Micro

Memory Stick Micro (M2)\*

\*Available with adapter

\*Available with adapter

**IEEE 1394a (Firewire-400) PCI Express x1 Adapter (1 internal port, 1 external port)**

Data Transfer Rate	Supports up to 400 Mbps
Devices Supported	IEEE-1394 compliant devices
Bus Type	PCIe card full height PCIe slots
Ports	One IEEE-1394a bilingual 6-Pin Connector (Rear)
System Requirements	Genuine Windows 10® Professional 64-bit, Genuine Windows 10DG to 7® Professional 64-bit  Not supported on Linux.  Premium® III or higher processor 128-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system available PCI slot
Temperature - Operating	50° to 131° F (10° to 55° C)
Temperature - Storage	-22° to 140° F (-30° to 60° C)
Relative Humidity - Operating	20% to 80%
Compliances	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC

	Intel I210-T1 Single Port Gigabit Ethernet Adapter	Intel I350-T2 Dual Port Gigabit Ethernet Adapter	Intel I350-T4 Quad Port Gigabit Ethernet Adapter
Cable Medium	Copper	Copper	Copper
Cabling Type	RJ-45 Category-5, up to 100 m	Cat 5 up to 100m	Cat 5 up to 100m
Bracket Height	Low Profile and Full Height	Low Profile and Full Height	Low Profile and Full Height
TDP	1W	4.4W	5W

# of Ports	Single	Dual	Quad
System Interface Type	PCIe 2.1 (2.5GT/s)	PCIe v2.1 (5.0GT/s)	PCIe v2.1 (5.0GT/s)
Intel® Virtualization Technology for Connectivity (VT-c)		Yes	Yes
Speed & Slot Width	2.5 GT/s, x1 Lane	5 GT/s, x4 Lane	5 GT/s, x4 Lane
Controller	Intel I210	Intel I350	Intel I350
iWARP/RDMA	No	No	No
Intel® Ethernet Power Management	Yes	Yes	Yes
Intel® Data Direct I/O Technology	No		
Intelligent Offloads	Yes	Yes	Yes
Storage Over Ethernet		iSCSI, NFS	iSCSI, NFS
On-chip QoS and Traffic Management	No	Yes	Yes
Flexible Port Partitioning	No	Yes	Yes
Virtual Machine Device Queues (VMDq)	No	Yes	Yes
PCI-SIG* SR-IOV Capable	No	Yes	Yes